



SHENZHEN ROMANSO ELECTRONIC CO., LTD.

Add: 3F, No.1 Building, Guanghui industrial park, Tianbao road, Yingrenshi community,
Shiyan town, Baoan district, Shenzhen
Tel: +86-0755-29197500
E-mail: romanso@romanso.com | Website: www.romanso.com

ROMANSO ELECTRONIC CO., LTD.

Add: Rm 20 Unit B3, 07/FL Tuen Mun, IND CTR NO 2 San Ping Circuit, Tuen Mun,
Hong Kong
Tel: +852 84001207

TW LIGHTS CO., LTD.

Add: Ou Ta Pung, Roka Kaoh, Kong Pisei, Kampong Speu, Cambodia
Tel: +855 98770307

Ver. 2025/10

ARCHITECTURAL & DECORATIVE
PRODUCT CATALOG
Indoor lighting solutions



Founded in 2007, ROMANSO is an ISO-certified professional LED lighting manufacturer specializing in industrial, commercial, and outdoor lighting solutions. As a national high-tech enterprise recognized for technological excellence, we integrate comprehensive R&D capabilities, vertical production systems, and global sales networks to deliver innovative, energy-efficient lighting products that meet international standards.

Guided by our corporate philosophy of "Quality First, Innovation Driven, Integrity Based, Service Oriented", ROMANSO has successfully implemented thousands of lighting projects across 50+ countries.

Looking forward, we remain committed to our mission of "Lighting the Businesses of Tomorrow Today!". Through continuous technological breakthroughs and strategic partnerships, ROMANSO strives to be your trusted lighting solutions partner in the global transition towards carbon neutrality.

Join hands with us to illuminate your tomorrow's success with today's smart lighting innovations.



CONTENTS

1 LED Linear Light




01-10

LED Cylinder Downlight



11-12

3 LED Panel Light

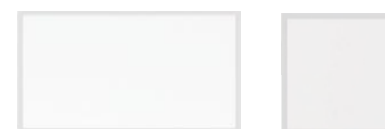

13-14

4 LED Troffer Light



15-18

5 LED Frame Light



19-22

6 LED Light Bar Kit



23-26

7 LED Batten Light




27-30

8 LED Vapor Tight Fixture




31-32

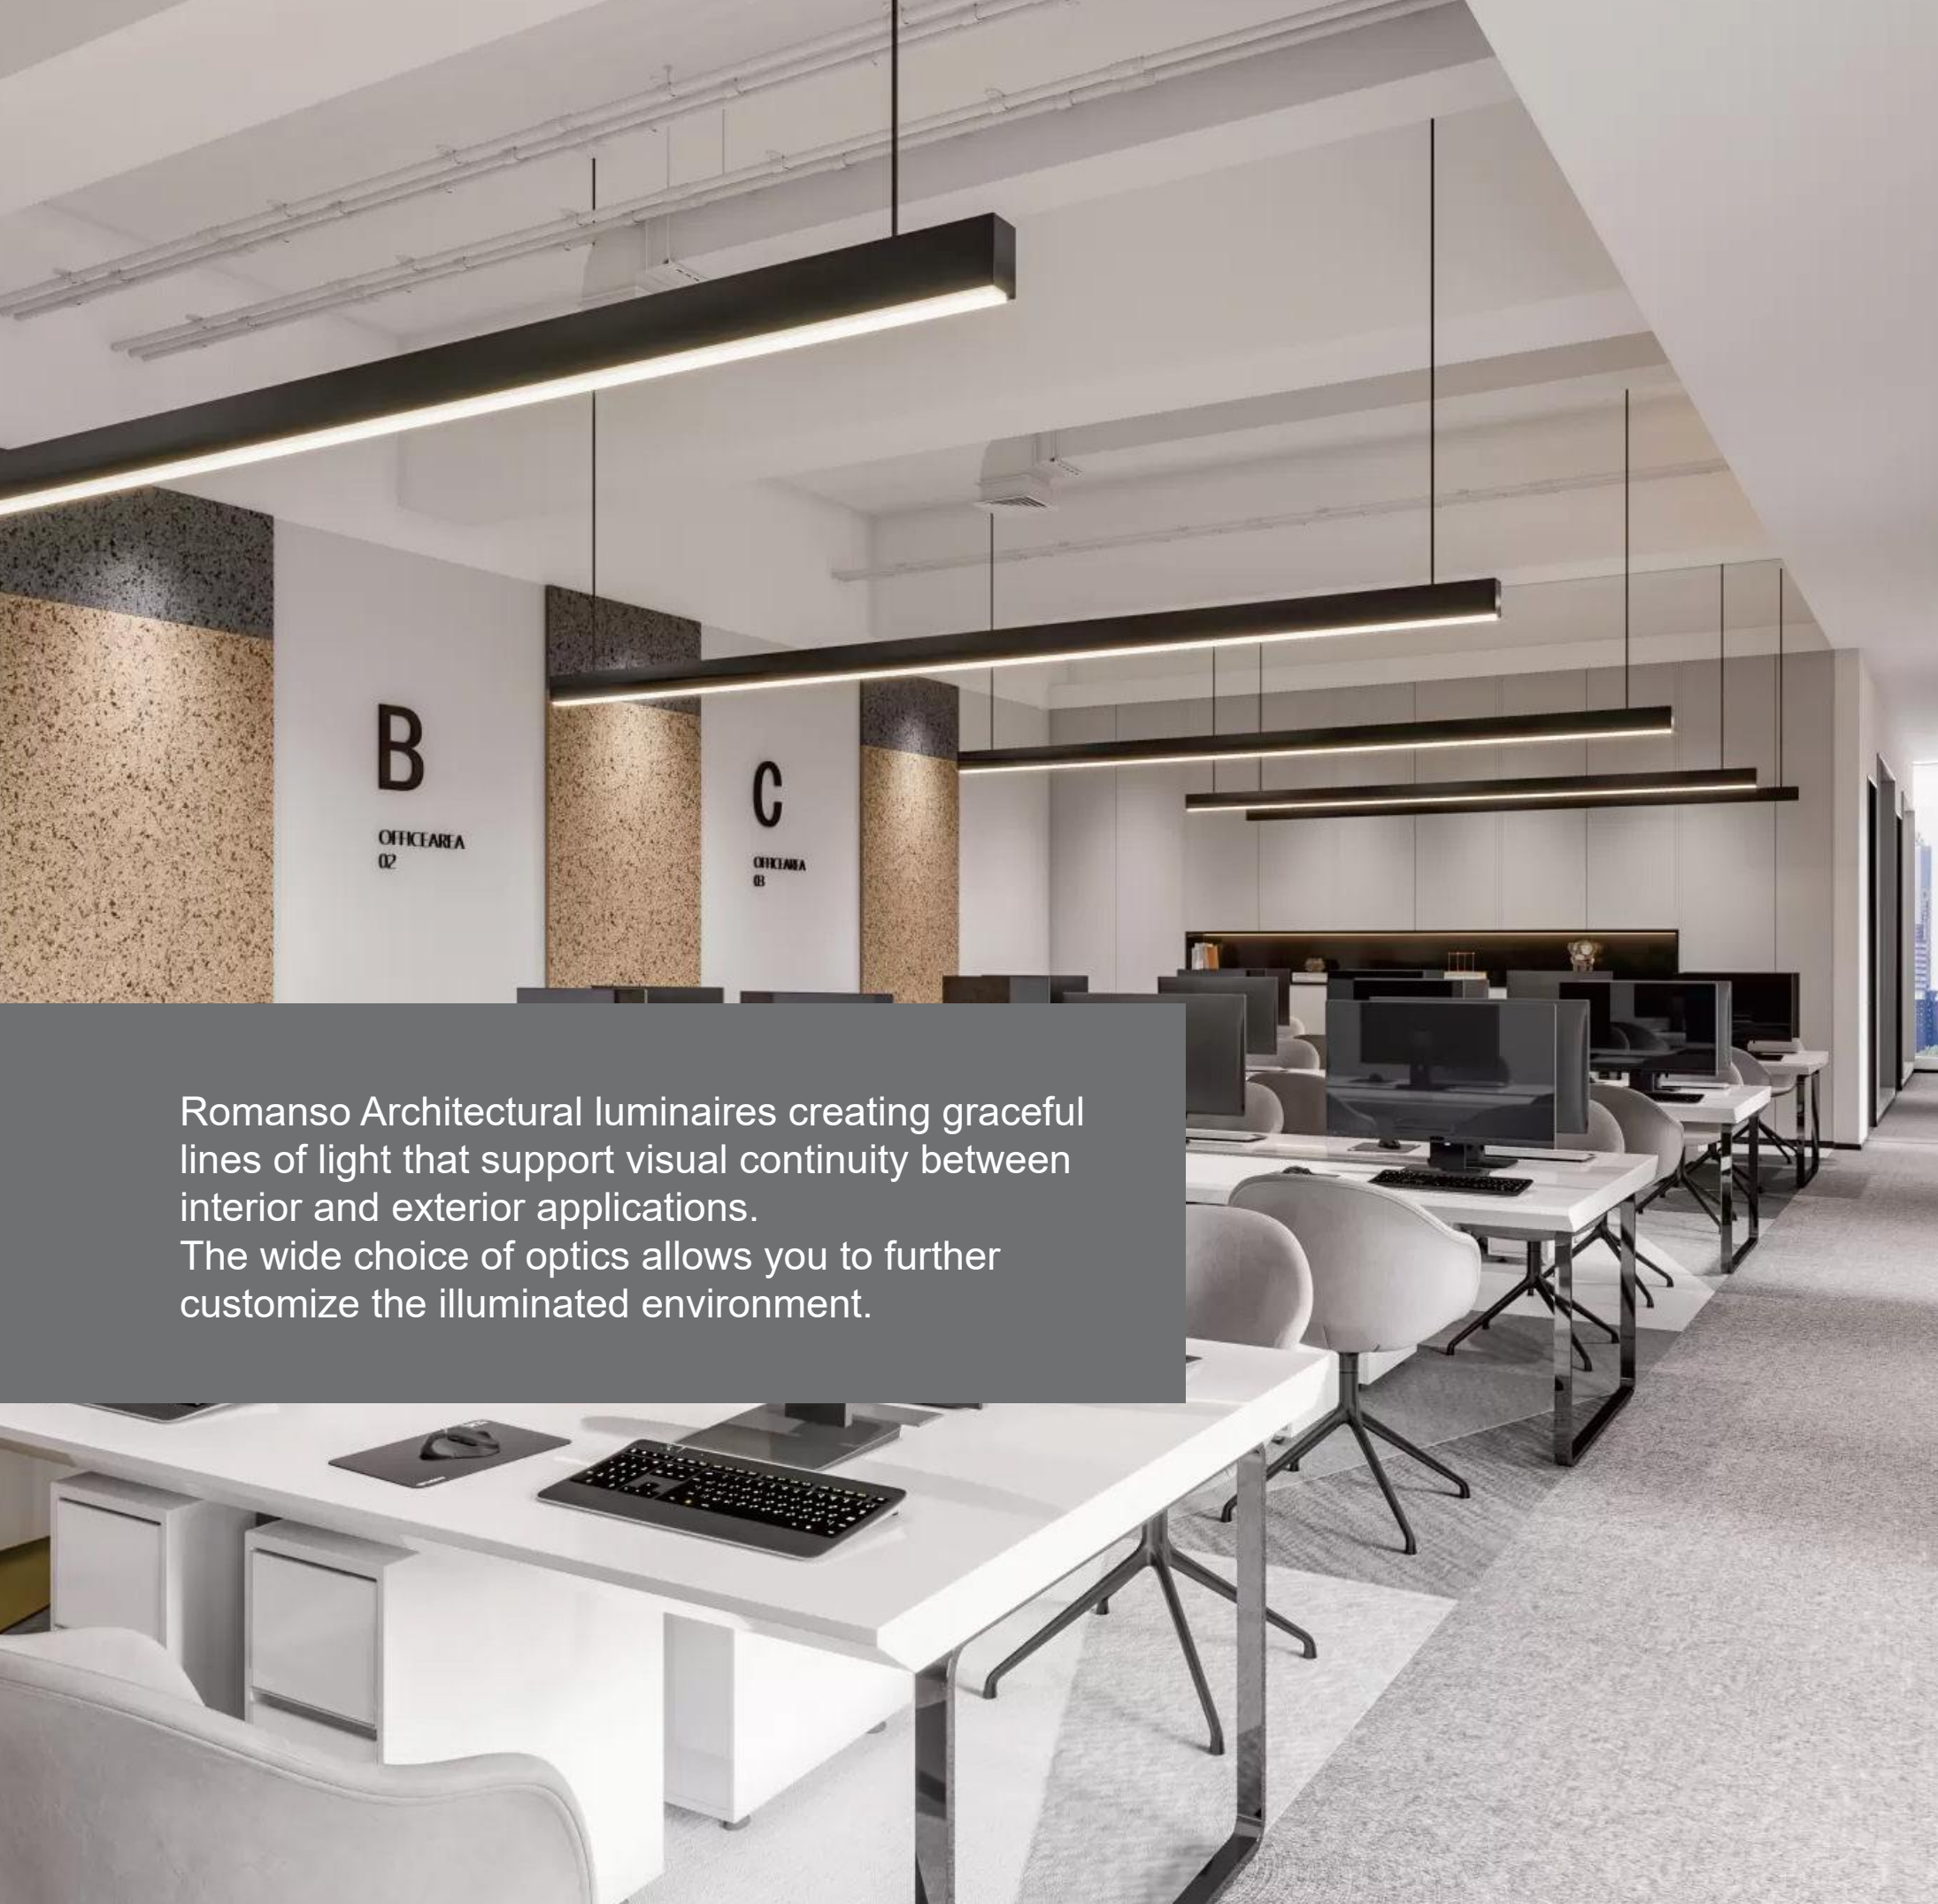

Romanso Architectural luminaires creating graceful lines of light that support visual continuity between interior and exterior applications. The wide choice of optics allows you to further customize the illuminated environment.

ARCHITECTURE LINEAR LIGHT

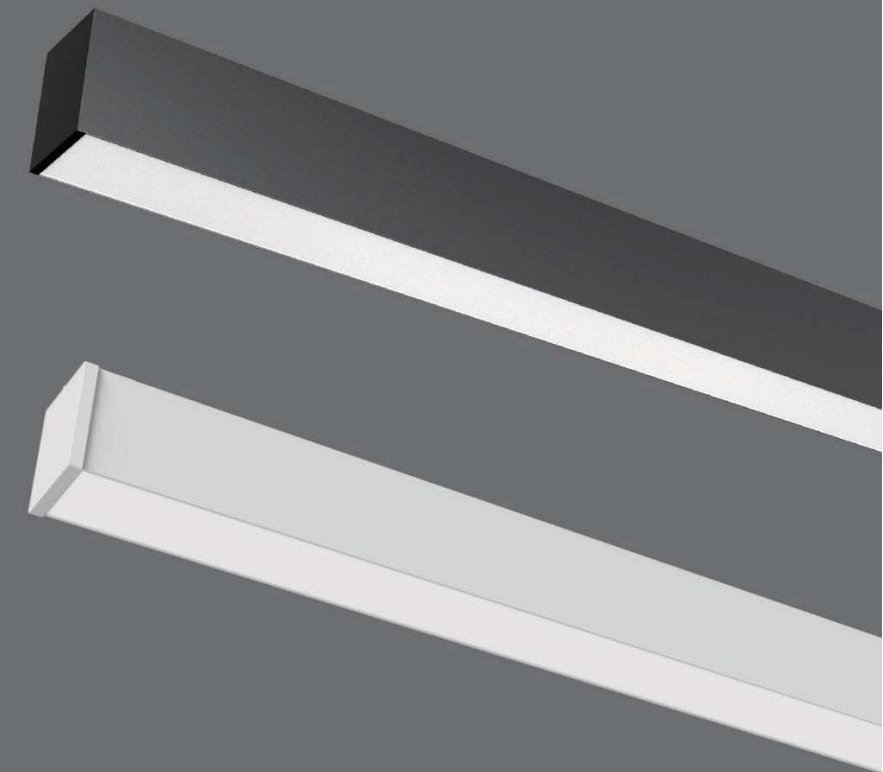


ARCHITECTURE LINEAR LIGHT




Feature

- Available in Pendant, Surface, Recessed mount.
- Five distribution adjustable by dip switch.
- Available in diffused and anti-glare louver reflector.
- Available in 2', 4', 6', 8' lengths.
- Custom pattern with optional for Line, L, X, T, Y, V joiners.
- Selectable wattage: 100%/75%/50%.
- CCT adjustable: 2700K/3000K/3500K/4000K/5000K.
- Universal 120-277 VAC input voltage.

Link Pattern

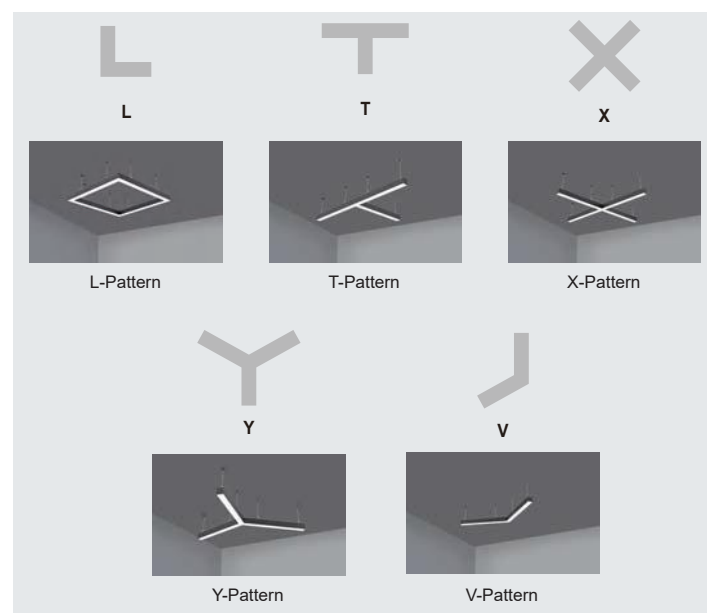

Dimension

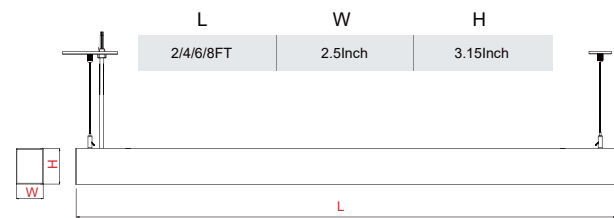

SKU	Size	CCT Select	Power Select	Light Output	Efficacy
RMS-H2507012F20	2ft	2700K/3000K/3500K/4000K/5000K	Max 20W	Max 1300lm/Ft	130 lm/W
RMS-H2507014F40	4ft	2700K/3000K/3500K/4000K/5000K	Max 40W	Max 1300lm/Ft	130 lm/W
RMS-H2507016F60	6ft	2700K/3000K/3500K/4000K/5000K	Max 60W	Max 1300lm/Ft	130 lm/W
RMS-H2507018F80	8ft	2700K/3000K/3500K/4000K/5000K	Max 80W	Max 1300lm/Ft	130 lm/W

WATTAGE, CCT AND DISTRIBUTION SELECT ADJUSTMENT

The dip switch is located on the top of the luminaire, which is easy to operate and supports 3 lumen output and 5 color temperature adjustments. And 5 distribution adjustment options are available.




Independent and detachable LED up-lighting module options, which effectively improves customer stocking and installation flexibility.

• **WATTAGE ADJUSTABLE TECHNOLOGY**
Each model supports 3 positions wattage regulation: 100%, 75%, 50%


• **CCT ADJUSTABLE TECHNOLOGY**
Five CCT adjustable: 2700K, 3000K, 3500K, 4000K, 5000K

• **DISTRIBUTION ADJUSTABLE TECHNOLOGY**
Five distribution adjustable

Distribution Adjustable

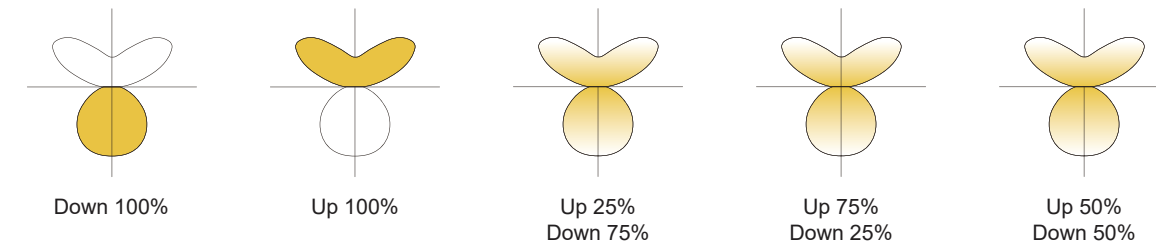

Frosted diffuser provides soft and Comfortable lighting.

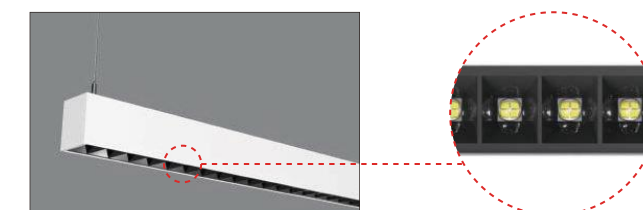

Optional anti-glare louver reflector, excellent lighting effect with UGR<19.

Lens Optional




Louver

Asymmetric

Baffle


ARCHITECTURE LINEAR LIGHT

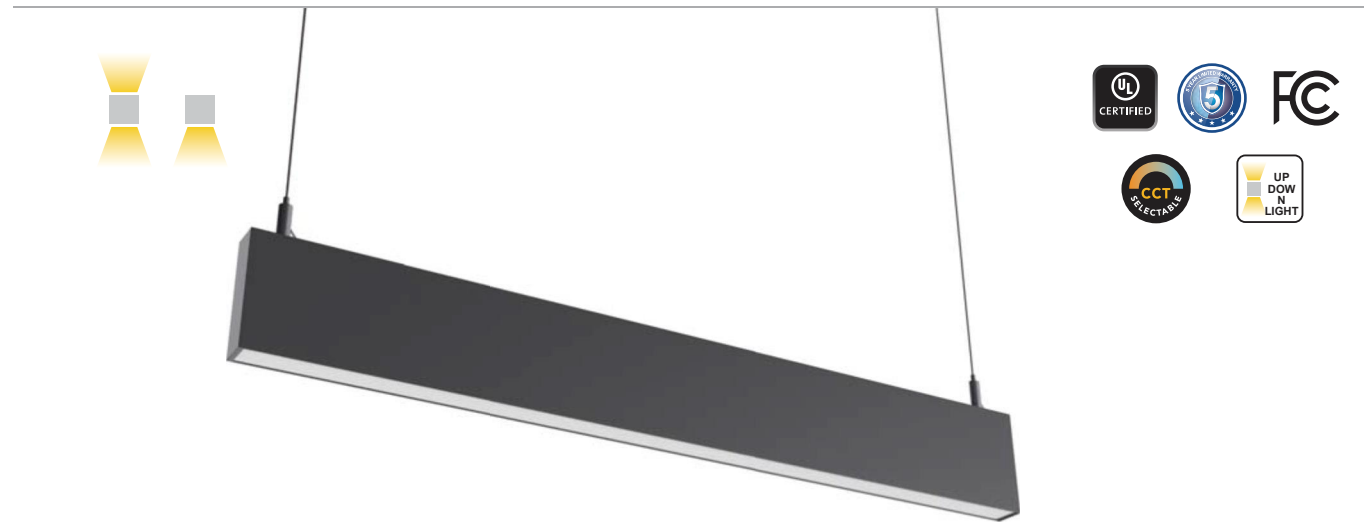


Feature

- Available in Dry Wall Pendant, Wall mount.
- Three distribution adjustable by dip switch.
- Available in diffused and anti-glare louver reflector.
- Available in 2', 4', 8' lengths.
- Custom pattern with optional for Line, L, X, T joiners.
- CCT adjustable: 2700K/3000K/3500K/4000K/5000K.
- Universal 120-277 VAC input voltag.

Link Pattern

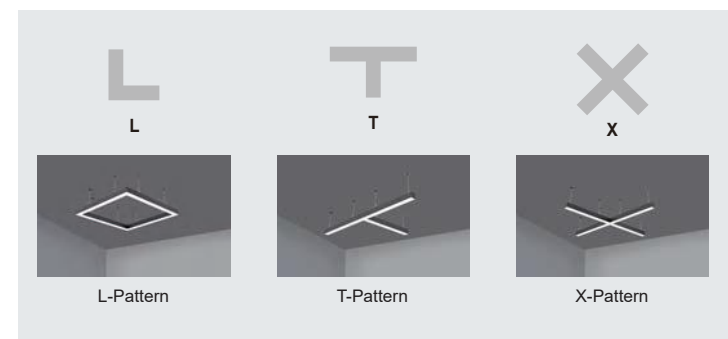

Dimension

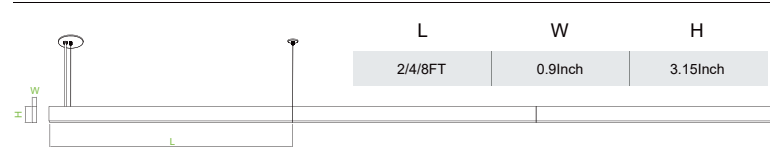

SKU	Size	CCT Select	Power Select	Light Output	Efficacy
RMS-H2507032F20	2ft	2700K/3000K/3500K/4000K/5000K	Max 20W	Max 1150lm/Ft	115 lm/W
RMS-H2507034F40	4ft	2700K/3000K/3500K/4000K/5000K	Max 40W	Max 1150lm/Ft	115 lm/W
RMS-H2507038F80	8ft	2700K/3000K/3500K/4000K/5000K	Max 80W	Max 1150lm/Ft	115 lm/W

SLIM ARCHITECTURE LINEAR LIGHT

Modern minimalism in the room with its slim and unobtrusive design. Direct and indirect lighting up and down, no reflective glare, enhances people's sense of well-being.




SIDE - MOUNTED HIDDEN DIP SWITCH




- **CCT A Robust DJUSTABLE TECHNOLOGY**
Five CCT adjustable:
2700K, 3000K, 3500K, 4000K, 5000K

- **DISTRIBUTION ADJUSTABLE**
Three distribution adjustable

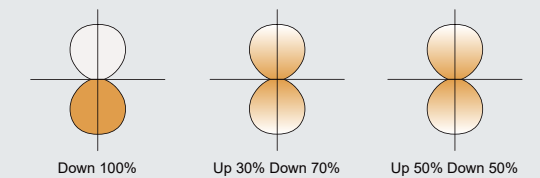

Lens Optional

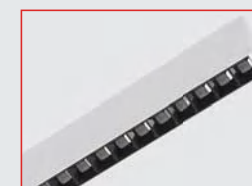


Louver



Frosted diffuser

ARCHITECTURE LINEAR LIGHT

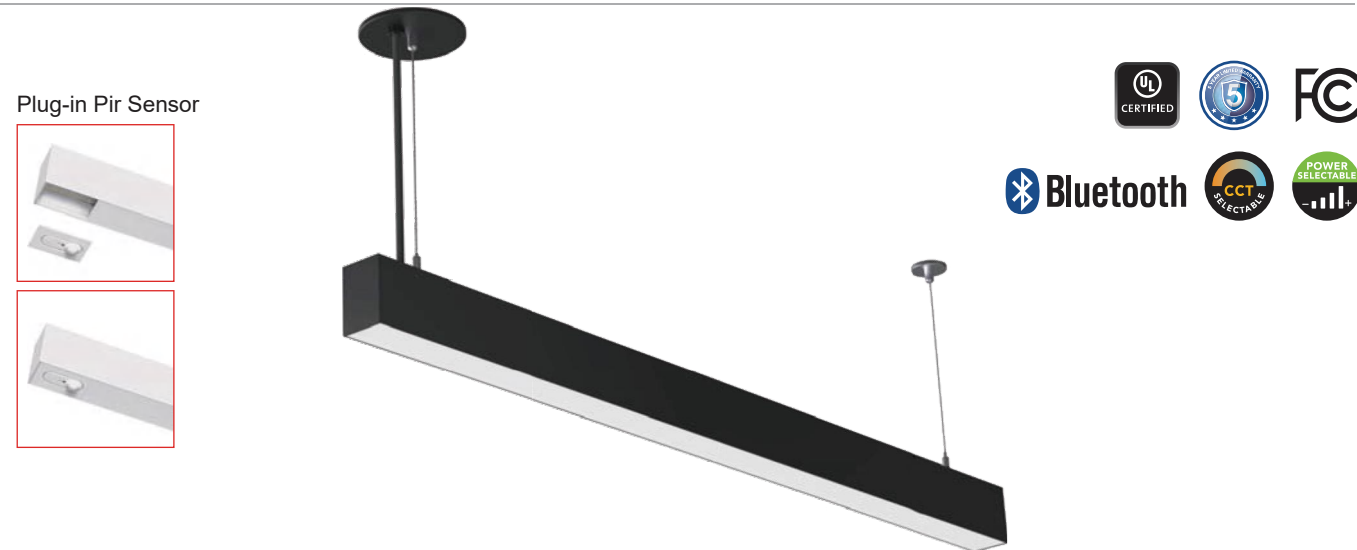


Plug-in Pir Sensor



Feature

- Available in Pendant, Surface, Recessed mount.
- Five distribution adjustable by dip switch.
- Available in 2', 4', 8' lengths.
- Custom pattern with optional for Line, L, X, T, Y, V joiners.
- Selectable wattage: 100%/75%/50%.
- CCT adjustable: 2700K/3000K/3500K/4000K/5000K.
- Universal 120-277 VAC input voltage.

Link Pattern

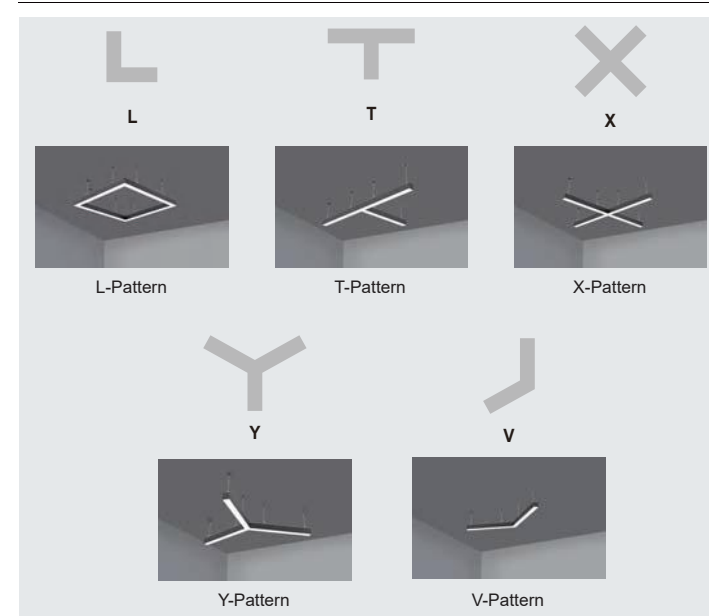


Dimension



Item	A	B	C
2ft	605mm	55mm	80mm
4ft	1205mm	55mm	80mm
8ft	2405mm	55mm	80mm

SKU	Size	CCT Select	Power Select	Light Output	Efficacy
RMS-H2507042F20	2ft	2700K/3000K/3500K/4000K/5000K	Max 20W	Max 1250lm/Ft	125 lm/W
RMS-H2507044F40	4ft	2700K/3000K/3500K/4000K/5000K	Max 40W	Max 1250lm/Ft	125 lm/W
RMS-H2507048F80	8ft	2700K/3000K/3500K/4000K/5000K	Max 80W	Max 1250lm/Ft	125 lm/W

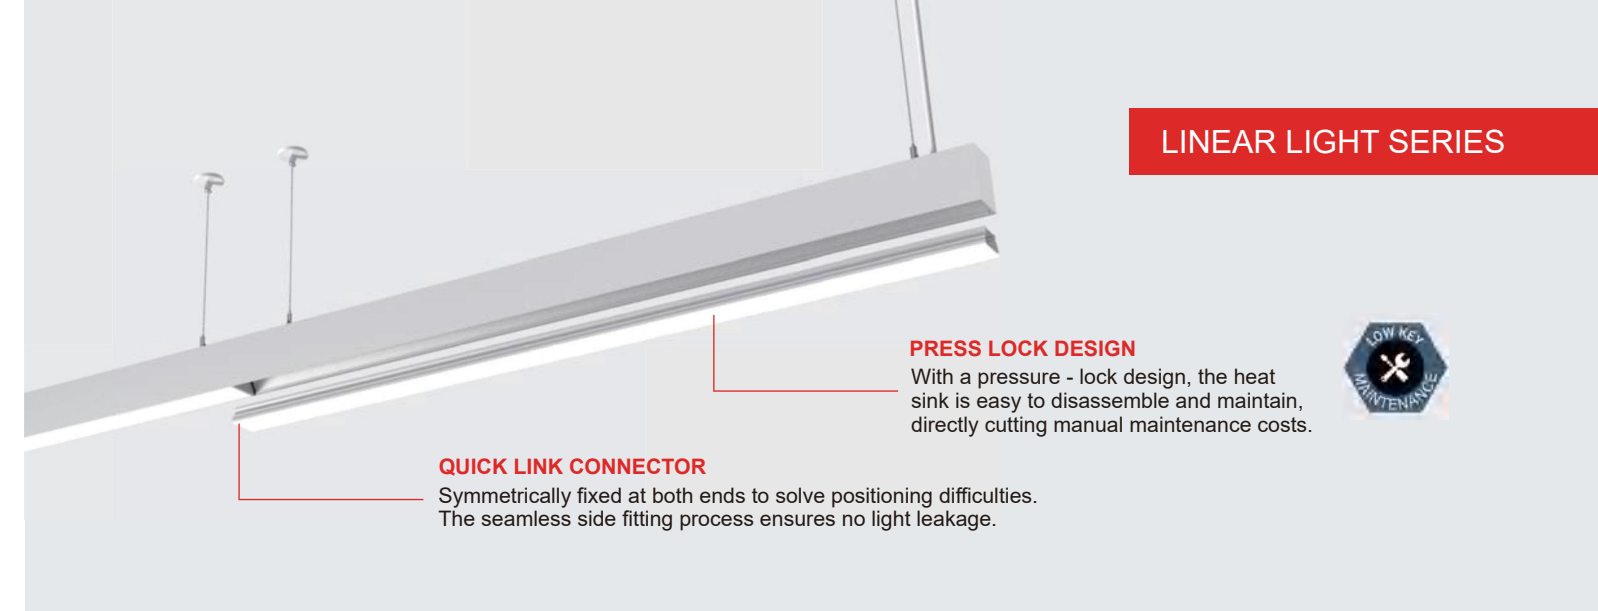

PRESS LOCK DESIGN

With a pressure - lock design, the heat sink is easy to disassemble and maintain, directly cutting manual maintenance costs.




QUICK LINK CONNECTOR

Symmetrically fixed at both ends to solve positioning difficulties. The seamless side fitting process ensures no light leakage.

INDIRECT OPTIC

Independent and detachable LED up-lighting module options, which effectively improves customer stocking and installation flexibility.

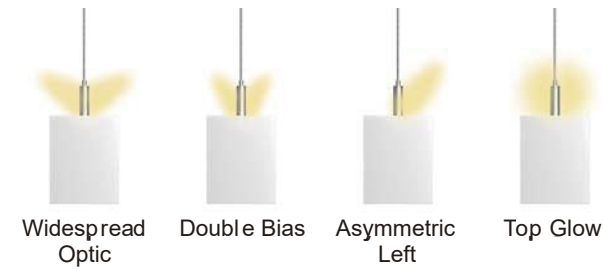


CCT ADJUSTABLE TECHNOLOGY


Five CCT adjustable: 2700K, 3000K, 3500K, 4000K, 5000K

WATTAGE ADJUSTABLE TECHNOLOGY

Each model supports 3 positions wattage regulation: 100%, 75%, 50%.

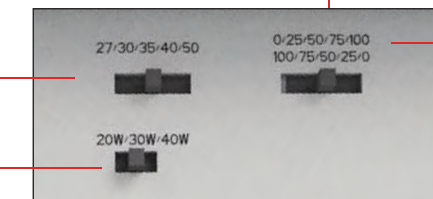


DISTRIBUTION ADJUSTABLE

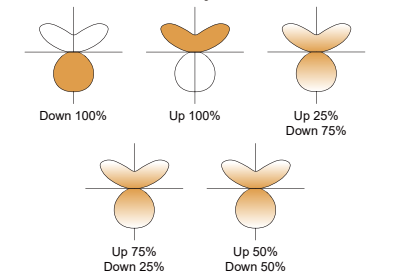

Lens Optional





ARCHITECTURE LINEAR LIGHT

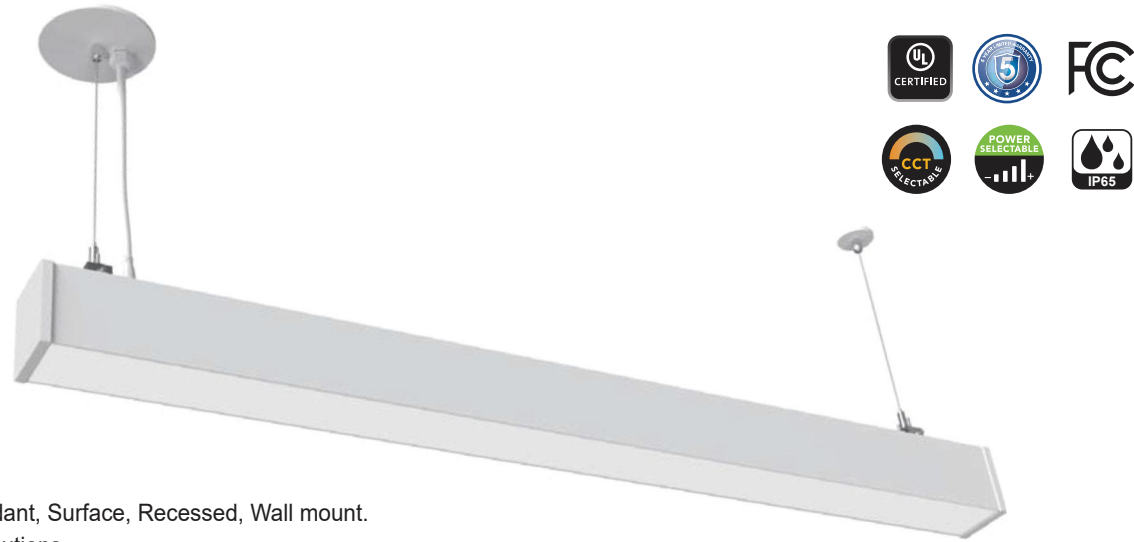

Feature

- Available in Pendant, Surface, Recessed, Wall mount.
- Wide 120° distributions.
- IP65 Waterproof.
- Available in 80CRI or 90 CRI option.
- Available in 2', 3', 4', 6', 8' lengths.
- Universal 120-277 VAC input voltage.
- Selectable wattage: 100%/75%/50%.
- CCT adjustable: 3000K/4000K/5000K.

Dimension

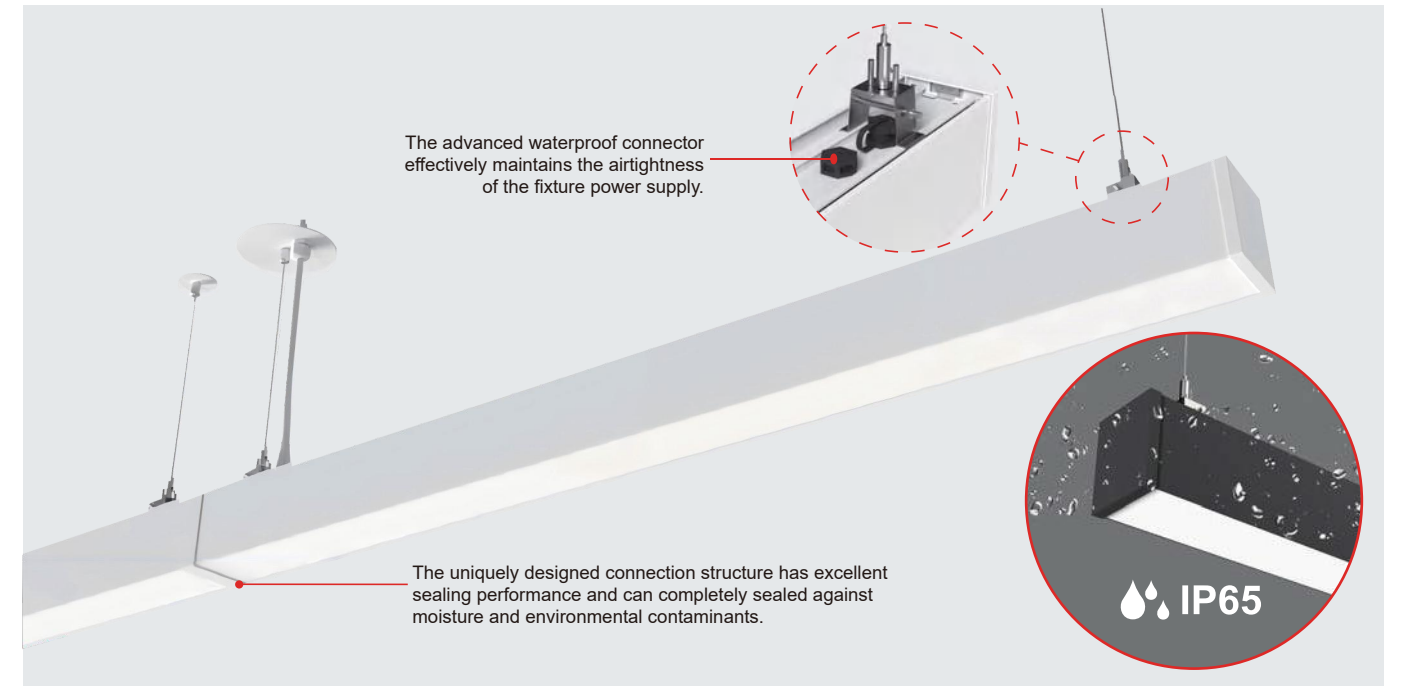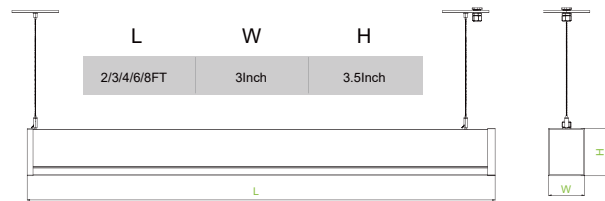

Durable coat finish is available in black or optional white.



White



Black

SKU	Size	CCT Select	Power Select	Light Output	Efficacy
RMS-H2507062F20	2ft	3000K/4000K/5000K	Max 20W	Max 1200lm/Ft	120 lm/W
RMS-H2507063F30	3ft	3000K/4000K/5000K	Max 30W	Max 1200lm/Ft	120 lm/W
RMS-H2507064F40	4ft	3000K/4000K/5000K	Max 40W	Max 1200lm/Ft	120 lm/W
RMS-H2507066F60	6ft	3000K/4000K/5000K	Max 60W	Max 1200lm/Ft	120 lm/W
RMS-H2507068F80	8ft	3000K/4000K/5000K	Max 80W	Max 1200lm/Ft	120 lm/W



ARCHITECTURAL CYLINDER DOWNLIGHT

The cylinder downlight features a simple design with modern and elegant integration. Made from high quality aluminum alloy and using advanced LED technology, it ensures energy savings and a long lifespan. A variety of installation methods adapt flexibly to both commercial and residential environments, meeting diverse lighting needs and creating a unique atmospheric style in spaces.


ARCHITECTURAL CYLINDER DOWNLIGHT



Feature

- Available in Cord Pendant, Surface, Stem Pendant and Surface Adjustable.
- Available in 80CRI or 90 CRI option.
- Beam Angle: 18°, 24°, 36°, 50°.
- Universal 120-277 VAC input voltage.
- Selectable wattage: 100%/75%/50%.
- CCT adjustable: 2700K/3000K/3500K/4000K/5000K.

Beam angle adjustable

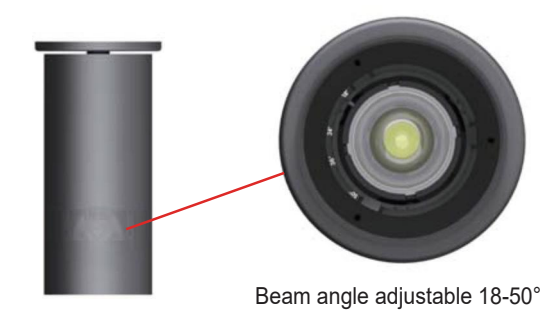


Baffle Optional



Dimension

Item	A	B
3"	211mm	Ø73mm
4"	211mm	Ø94mm
6"	254mm	Ø150mm

Mounting Optional

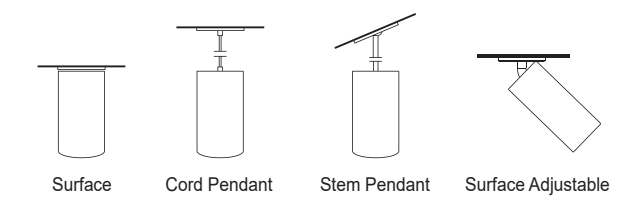

SKU	Size	CCT Select	Power Select	Light Output	Efficacy
RMS-H2508315	3"	2700K/3000K/3500K/4000K/5000K	Max 15W	Max 1500lm	100 lm/W
RMS-H2508425	4"	2700K/3000K/3500K/4000K/5000K	Max 25W	Max 2500lm	100 lm/W
RMS-H2508640	6"	2700K/3000K/3500K/4000K/5000K	Max 40W	Max 4000lm	100 lm/W




PANEL LIGHT

Romanso LED Panel series is fully configurable to meet today's complex lighting and control needs. It provides comprehensive solutions, including sensor controls, emergency back-up, and high lumen output options. Its low-profile, back-lit design ensures uniform illumination that fits shallow plenums with ample space.

This series is ideal for schools, offices, healthcare facilities, and other commercial environments.


LED PANEL LIGHT

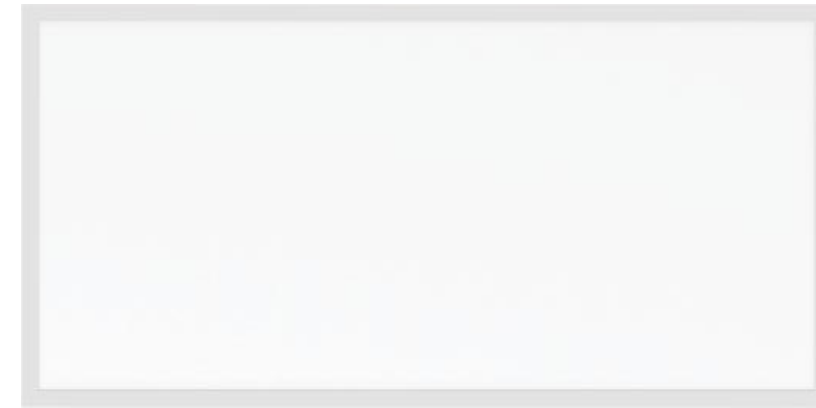

Feature

- Universal 120-277VAC input voltage.
- Standard T bar design ensures the fixture easily locks onto the grid ceiling
- Installation: Surface Mount (default), Recessed Mount (optional), Suspended mount (optional).
- 0-10V dimming driver supports dimming from 10% to 100%.
- CCT adjustable for 3000K/3500K/4000K/5000K/6500K.
- New backlit technology provides optimal light diffusion and uniform surface brightness.

Dimension

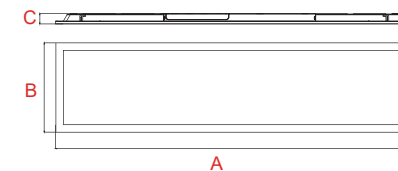

Item	A	B	C
1x4ft	1213mm	303mm	35mm
2x2ft	603mm	603mm	35mm
2x4ft	1213mm	603mm	35mm

Accessories



PIR Sensor
Description:
10-14VDC input voltage
ANT-1P-5T(sensor)



LED Emergency Driver
STB35FA-08WLI-170
DC150-170V output, 8W

SKU	Size	CCT Select	Power Select	Light Output	Efficacy
RMS-H25012240	1x4FT	3500K/3500K/4000K/5000K/6500K	Max 40W	Max 5200lm	130 lm/W
RMS-H25011440	2x2FT	3500K/3500K/4000K/5000K/6500K	Max 40W	Max 5200lm	130 lm/W
RMS-H25012472	2x4FT	3500K/3500K/4000K/5000K/6500K	Max 72W	Max 9360lm	130 lm/W



TROFFER LIGHT

Illuminate Your Space with Style! Discover the Romano LED Troffer Light - designed for unparalleled uniformity and modern aesthetics. Transform your commercial and institutional environments with soft, comfortable lighting that enhances productivity and well-being. Perfect for offices, classrooms, retail, and healthcare facilities, our Troffer Lights offer energy efficiency without compromising on design.


TROFFER LIGHT



Feature

- Uniform light output and anti-glare
- Superior Aesthetics, offering no shadows and bringing visual comfort
- Suitable for retrofit and new construction Easyinstallation.
- CRI: >80CRI
- 0-10V dimming driver standard for 10% to 100% dimming.
- Universal 120-277 VAC input voltage.
- CCT adjustable: 3000K, 3500K, 4000K, 5000K, 6500K.

Dimension



Item	A	B	C
2x2ft	603mm	603mm	45mm
2x4ft	1213mm	603mm	45mm

Accessories



PIR Sensor
Description:
10-14VDC input voltage
ANT-1P-5T(sensor)



LED Emergency Driver
STB35FA-08WLI-170
DC150-170V output, 8W

SKU	Size	CCT Select	Power Select	Light Output	Efficacy
RMS-H25102240	2x2FT	3000K/3500K/4000K/5000K/6500K	Max 40W	Max 5200lm	130 lm/W
RMS-H25102472	2x4FT	3000K/3500K/4000K/5000K/6500K	Max 72W	Max 7360lm	130 lm/W


ARCHITECTURAL TROFFER LIGHT



Feature

- Weigh much less than regular LED panels, easy handling.
- Suitable for retrofit and new construction Easy installation.
- CRI >80.
- Standard 0-10V dimming driver supports dimming from 10% to 100%.
- Universal 120-277 VAC input voltage.
- Selectable wattage: 100%/75%/50%.
- CCT adjustable: 3000K/3500K/4000K/5000K/6500K.

Dimension

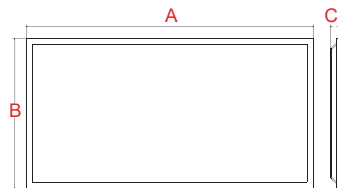

Item	A	B	C
1x4ft	1213mm	303mm	30mm
2x2ft	603mm	603mm	30mm
2x4ft	1213mm	603mm	30mm

Accessories



PIR Sensor
Description:
10-14VDC input voltage
ANT-1P-5T(sensor)



LED Emergency Driver
STB35FA-08WLI-170
DC150-170V output, 8W

SKU	Size	CCT Select	Power Select	Light Output	Efficacy
RMS-H25100314F40	1x4FT	3000K/3500K/4000K/5000K/6500K	Max 40W	Max 5200lm	125lm/W
RMS-H25100322F40	2x2FT	3000K/3500K/4000K/5000K/6500K	Max 40W	Max 5200lm	125lm/W
RMS-H25100324F50	2x4FT	3000K/3500K/4000K/5000K/6500K	Max 50W	Max 6600lm	125lm/W
RMS-H25100314F30H	1x4FT	3000K/3500K/4000K/5000K/6500K	Max 30W	Max 4700lm	150lm/W
RMS-H25100322F30H	2x2FT	3000K/3500K/4000K/5000K/6500K	Max 30W	Max 4700lm	150lm/W
RMS-H25100324F50H	2x4FT	3000K/3500K/4000K/5000K/6500K	Max 50W	Max 5500lm	150lm/W


TROFFER LIGHT



Feature

- Uniform light output and anti-glare
- Superior Aesthetics, offering no shadows and bringing visual comfort
- Suitable for retrofit and new construction Easy installation.
- CRI: >80CRI
- 0-10V dimming driver standard for 10% to 100% dimming.
- Universal 120-277 VAC input voltage.
- Wattage selectable: 100%, 75%, 50%.
- CCT adjustable: 3000K, 4000K, 5000K.

Dimension



Item	A	B	C
2x2ft	603mm	603mm	45mm
2x4ft	1213mm	603mm	45mm

Accessories



PIR Sensor
Description:
10-14VDC input voltage
ANT-1P-5T(sensor)



LED Emergency Driver
STB35FA-08WLI-170
DC150-170V output, 8W


SKU	Size	CCT Select	Power Select	Light Output	Efficacy
RMS-H25100422F40	2x2FT	3000K/3500K/4000K/5000K/6500K	Max 40W	Max 5200lm	125 lm/W
RMS-H25100424F50	2x4FT	3000K/3500K/4000K/5000K/6500K	Max 50W	Max 6600lm	125 lm/W
RMS-H25100422F30H	2x2FT	3000K/3500K/4000K/5000K/6500K	Max 30W	Max 4700lm	150 lm/W
RMS-H25100424F35H	2x4FT	3000K/3500K/4000K/5000K/6500K	Max 35W	Max 5500lm	150 lm/W




FRAME LIGHT

Romanso LED Frame Light is built to last with a durable aluminum frame, ensuring strength and longevity. Its seamless design prevents light leakage in the corners, providing soft illumination. This innovative fixture reduces glare by 60% while maintaining the same light distribution as a flat panel. It is easy to mount in standard-size ceilings, fitting perfectly into the center cavity of the fixture.

The newest LED Frame Light delivers high-efficiency, energy-saving LED diffused light, making it ideal for private offices, open office areas, upscale retail environments, public circulation spaces, and classrooms.

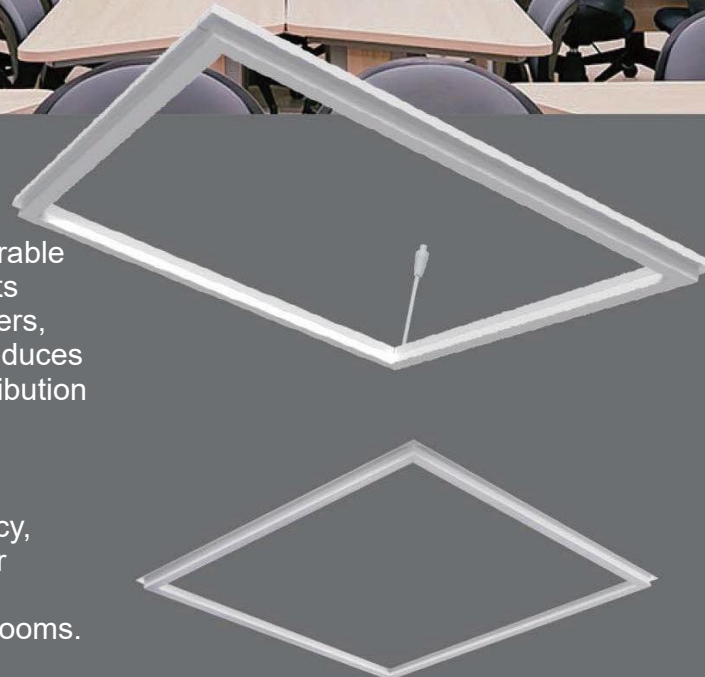


FRAME LIGHT

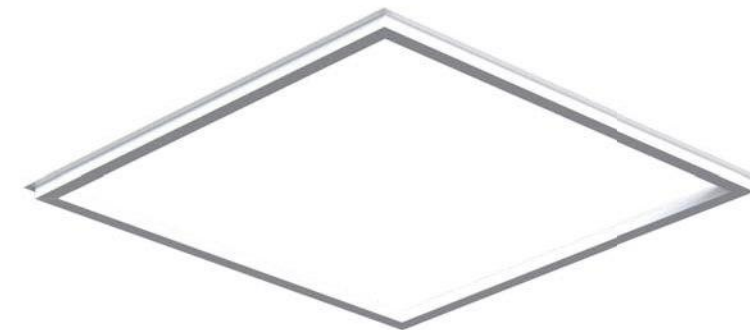

Feature


- Uniform light output and anti-glare
- Superior Aesthetics, offering no shadows and bringing visual comfort
- Suitable for retrofit and new construction Easyinstallation.
- CRI: >80CRI
- 0-10V dimming driver standard for 10% to 100% dimming.
- Universal 120-277 VAC input voltage.
- Wattage selectable: 100%, 75%, 50%.
- CCT adjustable: 3000K, 3500K, 4000K, 5000K, 6500K.


Dimension




Item	A	B	C
2x2ft	603mm	603mm	15mm
1x4ft	1213mm	303mm	15mm
2x4ft	1213mm	603mm	15mm

Accessories

- 

Occupancy PIR sensor
Description: Indoor standalone AC input PIR sensor
- 

Occupancy PIR sensor
STB35FA-08WLi-170
DC150-170V output, 8W
- 

Emergency Battery Backup
Description:8W 90min

SKU	Size	CCT Select	Power Select	Light Output	Efficacy
RMS-H25110114F40	1x4FT	3000K/3500K/4000K/5000K/6500K	Max 40W	Max 5000lm	125 lm/W
RMS-H25110122F40	2x2FT	3000K/3500K/4000K/5000K/6500K	Max 40W	Max 5000lm	125 lm/W
RMS-H25110124F50	2x4FT	3000K/3500K/4000K/5000K/6500K	Max 50W	Max 6250lm	125 lm/W


FRAME LIGHT



Feature




- Weigh much less than regular LED panels, easy handling.
- Suitable for retrofit and new construction Easy installation.
- CRI >80.
- Standard 0-10V dimming driver supports dimming from 10% to 100%.
- Universal 120-277 VAC input voltage.
- Selectable wattage: 100%/75%/50%.
- CCT adjustable: 3000K/3500K/4000K/5000K/6500K.

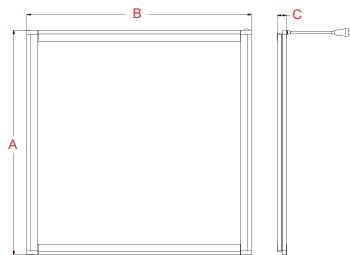Dimension



Item	A	B	C
1x4ft	1213mm	304mm	25mm
2x2ft	604mm	604mm	25mm
2x4ft	1213mm	604mm	25mm

Accessories

-  Occupancy PIR sensor
Description: Indoor standalone AC input PIR sensor
-  Occupancy PIR sensor
STB35FA-08WLi-170
DC150-170V output, 8W
-  Emergency Battery Backup
Description: 8W 90min

SKU	Size	CCT Select	Power Select	Light Output	Efficacy
RMS-H25110222F40	2x2FT	3000K/3500K/4000K/5000K/6500K	Max 40W	Max 5000 lm	125 lm/W
RMS-H25110214F40	1x4FT	3000K/3500K/4000K/5000K/6500K	Max 40W	Max 5000 lm	125 lm/W
RMS-H25110224F50	2x4FT	3000K/3500K/4000K/5000K/6500K	Max 50W	Max 6250 lm	125 lm/W

Without sacrificing performance, it only takes a few seconds to connect the male and female components, resulting in a complete fixture.



Bulk packaging reduces overall cost of storage, handling, unpacking and clean-up.




Fit up to 4X more on a pallet and lift platform



LED LIGHT BAR KIT

Transform Your Space with the Romanso Light Bar Kit! Experience a cost-effective LED retrofit solution that effortlessly upgrades any fluorescent fixture using T8, T12, or T5/T5HO lamps. Enjoy seamless installation without removing the housing, and benefit from enhanced reliability, superior thermal performance, and impressive longevity. Illuminate your environment while minimizing renovation costs and waste—choose Romanso for a brighter, more efficient future!

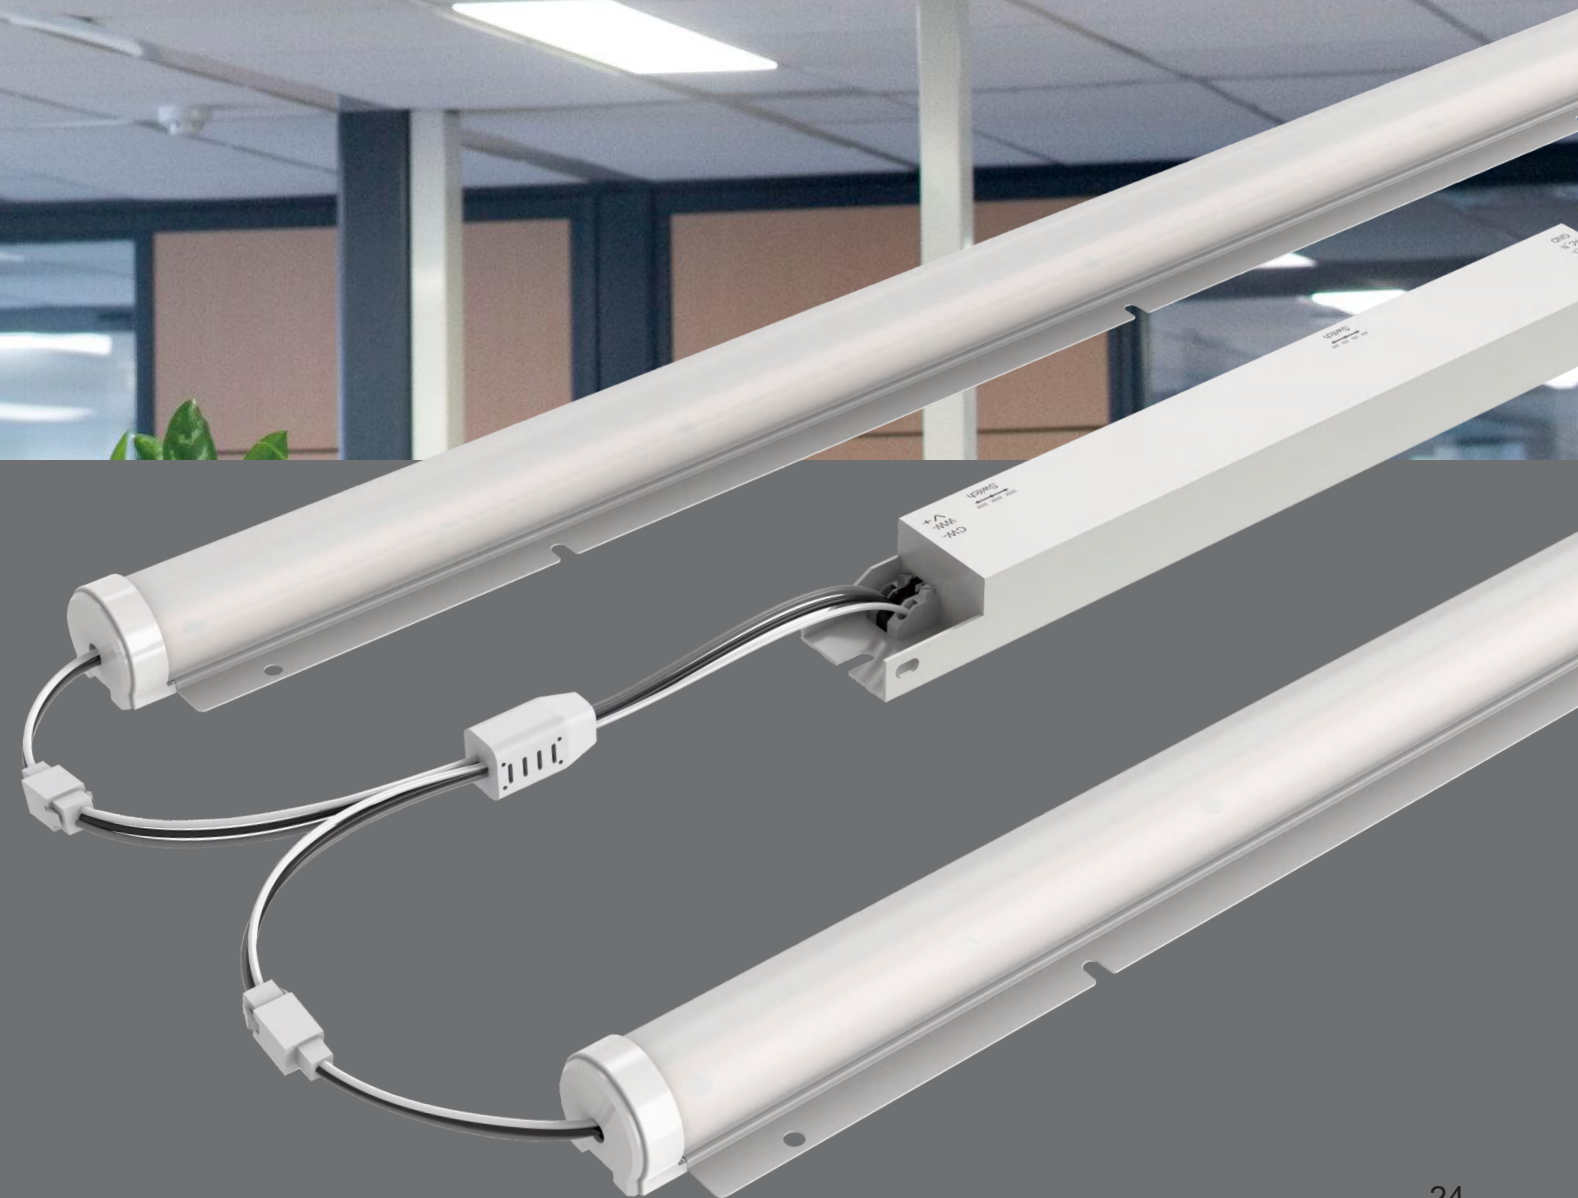

LIGHT BAR KIT



Feature

- Contractor-friendly design ensures quick and easy installation.
- Eliminates the need for existing lampholders and reduces confusing wiring for improved reliability.
- LEDs deliver over 160 LPW, providing lower input watts with more light output.
- Estimated LED lifespan of 50,000 hours based on IES LM-80 results and TM-21 calculations.
- Adjustable CCTs 3000K, 3500K, 4000K, 5000K, 6500K.
- Durable PC housing featuring a compact and simple design for enhanced cost-effectiveness.

Dimension

Item	A	B	C
2ft	534mm	19.5mm	19mm
4ft	1127mm	19.5mm	19mm

Accessories



PIR Sensor
Description:
12VDC input voltage
(Bluetooth & Regular)



Emergency Battery
STB41A-08WLi-55
8W,90min

SKU	Size	CCT Select	Power Select	Light Output	Efficacy
RMS-H2512012F13AD1	2FT*1bar	3000K/3500K/4000K/5000K/6500K	Max 13W	Max 2080lm	160 lm/W
RMS-H2512012F25AD2	2FT*2bar	3000K/3500K/4000K/5000K/6500K	Max 25W	Max 4000lm	160 lm/W
RMS-H2512012F45AD3	2FT*3bar	3000K/3500K/4000K/5000K/6500K	Max 45W	Max 7200lm	160 lm/W
RMS-H2512012F45AD4	2FT*4bar	3000K/3500K/4000K/5000K/6500K	Max 45W	Max 7200lm	160 lm/W
RMS-H2512013F13AD1	3FT*1bar	3000K/3500K/4000K/5000K/6500K	Max 13W	Max 2080lm	160 lm/W
RMS-H2512013F25AD2	3FT*2bar	3000K/3500K/4000K/5000K/6500K	Max 25W	Max 4000lm	160 lm/W
RMS-H2512013F45AD3	3FT*3bar	3000K/3500K/4000K/5000K/6500K	Max 45W	Max 7200lm	160 lm/W
RMS-H2512013F45AD4	3FT*4bar	3000K/3500K/4000K/5000K/6500K	Max 45W	Max 7200lm	160 lm/W
RMS-H2512014F13AD1	4FT*1bar	3000K/3500K/4000K/5000K/6500K	Max 13W	Max 2080lm	160 lm/W
RMS-H2512014F25AD2	4FT*2bar	3000K/3500K/4000K/5000K/6500K	Max 25W	Max 4000lm	160 lm/W
RMS-H2512014F45AD3	4FT*3bar	3000K/3500K/4000K/5000K/6500K	Max 45W	Max 7200lm	160 lm/W
RMS-H2512014F45AD4	4FT*4bar	3000K/3500K/4000K/5000K/6500K	Max 45W	Max 7200lm	160 lm/W

LIGHT BAR KIT



Feature

- Contractor-friendly design ensures quick and easy installation.
 - Eliminates the need for existing lampholders and reduces confusing wiring for improved reliability.
 - LEDs deliver over 160 LPW, providing lower input watts with more light output.
 - Estimated LED lifespan of 50,000 hours based on IES LM-80 results and TM-21 calculations.
 - Adjustable CCTs 3000K, 3500K, 4000K, 5000K, 6500K.
- Sheet metal housing for superior heat dissipation performance and higher wattage output.

Dimension

Item	A	B	C
2ft	574mm	42mm	24mm
3ft	874mm	42mm	24mm
4ft	1127mm	42mm	24mm

Accessories



PIR Sensor
Description:
12VDC input voltage
(Bluetooth & Regular)



Emergency Battery
STB41A-08WLi-55
8W,90min

SKU	Size	CCT Select	Power Select	Light Output	Efficacy
RMS-H2512022F25AD1	2FT*1bar	3000K/3500K/4000K/5000K/6500K	Max 25W	Max 4000lm	160 lm/W
RMS-H2512022F45AD2	2FT*2bar	3000K/3500K/4000K/5000K/6500K	Max 45W	Max 7200lm	160 lm/W
RMS-H2512022F65AD3	2FT*3bar	3000K/3500K/4000K/5000K/6500K	Max 65W	Max 10400lm	160 lm/W
RMS-H2512022F65AD4	2FT*4bar	3000K/3500K/4000K/5000K/6500K	Max 65W	Max 10400lm	160 lm/W
RMS-H2512023F25AD1	3FT*1bar	3000K/3500K/4000K/5000K/6500K	Max 25W	Max 4000lm	160 lm/W
RMS-H2512023F45AD2	3FT*2bar	3000K/3500K/4000K/5000K/6500K	Max 45W	Max 7200lm	160 lm/W
RMS-H2512023F65AD3	3FT*3bar	3000K/3500K/4000K/5000K/6500K	Max 65W	Max 10400lm	160 lm/W
RMS-H2512023F65AD4	3FT*4bar	3000K/3500K/4000K/5000K/6500K	Max 65W	Max 10400lm	160 lm/W
RMS-H2512024F25AD1	4FT*1bar	3000K/3500K/4000K/5000K/6500K	Max 25W	Max 4000lm	160 lm/W
RMS-H2512024F45AD2	4FT*2bar	3000K/3500K/4000K/5000K/6500K	Max 45W	Max 7200lm	160 lm/W
RMS-H2512024F65AD3	4FT*3bar	3000K/3500K/4000K/5000K/6500K	Max 65W	Max 10400lm	160 lm/W
RMS-H2512024F65AD4	4FT*4bar	3000K/3500K/4000K/5000K/6500K	Max 65W	Max 10400lm	160 lm/W




BATTEN LIGHT



Feature

- Standard lengths of 2ft, 4ft, and 8ft, extendable via connectors.
- The fixture channel, cover, and plates are made of cold-rolled steel.
- Housing components provides effective LED heat dissipation.
- Scalable lumen packages range from 3,360 to 12,040 lumens, with efficacy up to 143 lm/W.
- Can be surface or suspended mounted using appropriate mounting options (see accessories).
- Adjustable CCT 3500K/4000K/5000K.

Dimension



Item	A	B	C
4ft	1184mm	69mm	66mm
8ft	2358mm	69mm	66mm

Accessories

-  **Emergency Battery Backup**
USE: 8W 900lm 90min.
-  **Microwave Sensor**
Description: 12VDC input
-  **PIR Sensor**
Description: 120-277VAC input

LED BATTEN LIGHT

Romanso LED Batten Light, also known as LED Linear Fixture Light, is a lightweight and versatile lighting solution. Its meticulously designed optical system effectively reduces glare and provides a comfortable lighting experience. Installation is easy and convenient, supporting continuous row mounting. The fixture is available in a color-selectable version, allowing for adjustable CCT settings 3500K/4000K/5000K.

SKU	Size	CCT Select	Power Select	Light Output	Efficacy
RMS-H2513034F36	4'	3500K/4000K/5000K	Max 36W	Max 5200lm	144 lm/W
RMS-H2513038F68	8'	3500K/4000K/5000K	Max 68W	Max 10600lm	156 lm/W


BATTEN LIGHT




Feature

- Standard lengths of 2ft, 4ft, and 8ft, extendable via connectors.
- The fixture channel, cover, and plates are made of cold-rolled steel.
- Housing components provides effective LED heat dissipation.
- Scalable lumen packages range from 3,360 to 12,040 lumens, with efficacy up to 143 lm/W.
- Can be surface or suspended mounted using appropriate mounting options (see accessories).
- Adjustable CCT 3500K/4000K/5000K.

Accessories

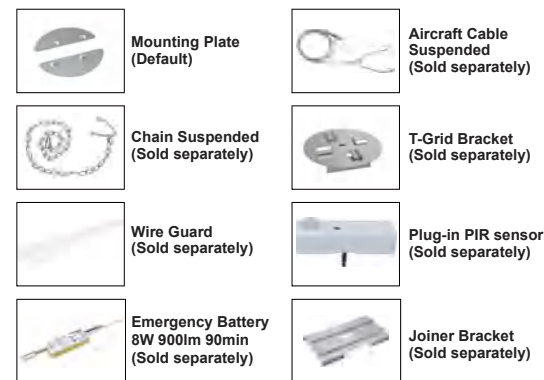


Dimension



Item	A	B	C
2ft	609mm	59mm	66mm
4ft	1219mm	59mm	66mm
8ft	2438mm	59mm	66mm

SKU	Size	CCT Select	Power Select	Light Output	Efficacy
RMS-H2513042F24	2FT	3000K/3500K/4000K/5000K/6500K	Max 24W	Max 3408lm	142 lm/W
RMS-H2513044F40	2FT	3000K/3500K/4000K/5000K/6500K	Max 40W	Max 5720lm	143 lm/W
RMS-H2513048F70	2FT	3000K/3500K/4000K/5000K/6500K	Max 70W	Max 10010lm	143 lm/W
RMS-H2513048F86	2FT	3000K/3500K/4000K/5000K/6500K	Max 86W	Max 12300lm	143 lm/W

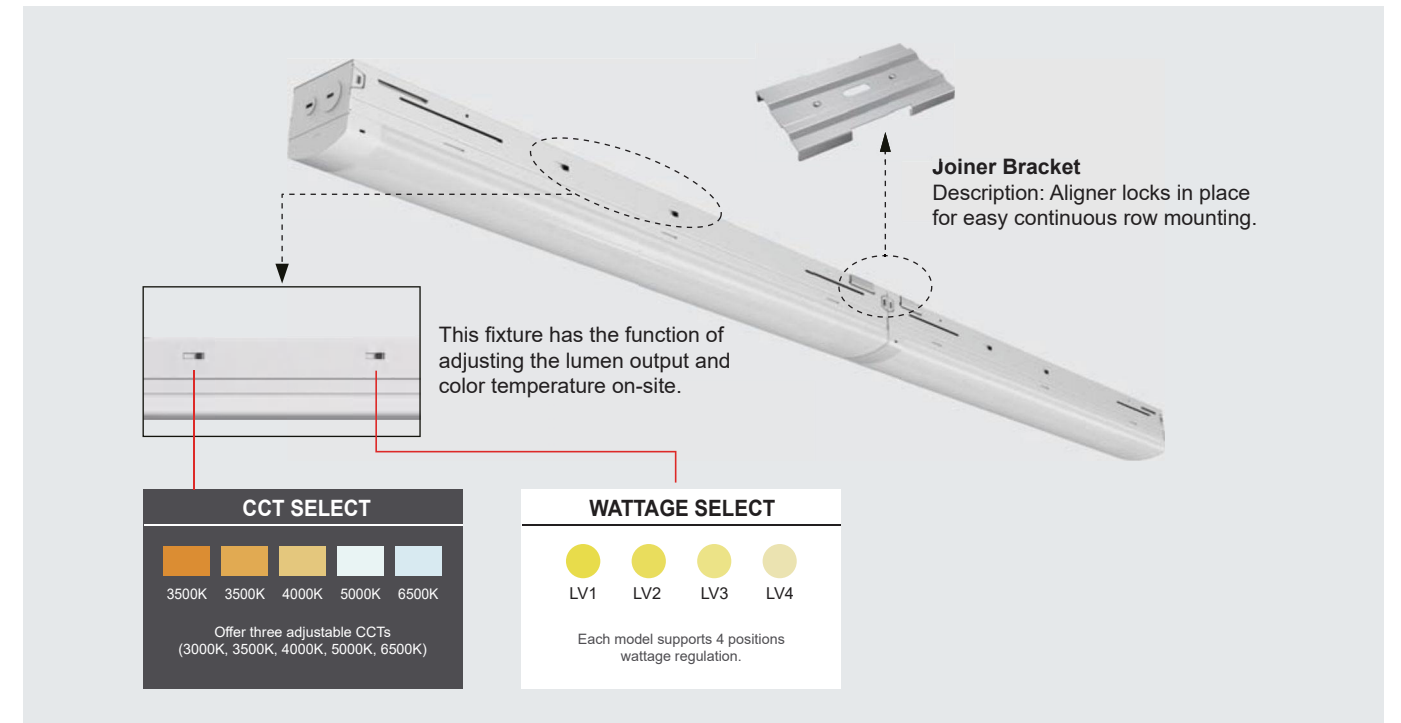


Plug-in PIR Sensor

The standard sensor receptacle allows for on-site modification.



Way To Install

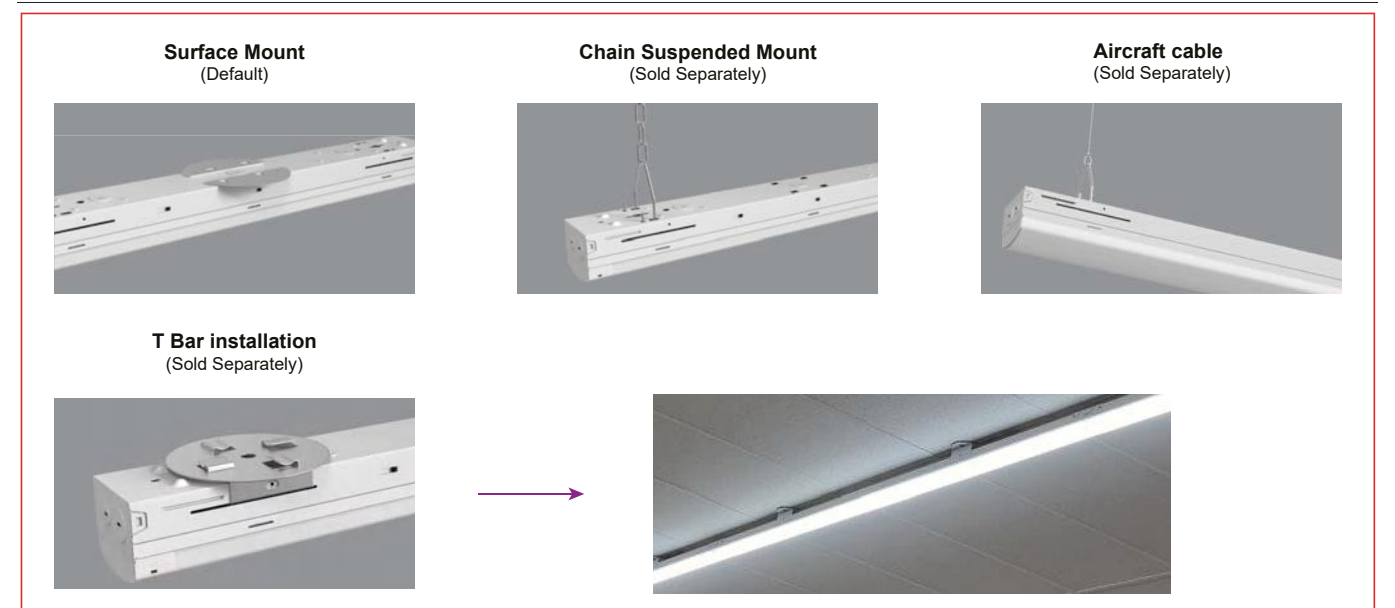



VAPOR TIGHT LIGHT



Feature


- Standard lengths of 4ft, and 8ft.
- Closed housing, sealed against moisture and environmental contaminants.
- Stainless steel clamp design, convenient assembly and separation of lamp body.
- Scalable lumen packages range from 9,000 to 15,000 lumens, with efficacy up to 150 lm/W.
- IP65 rating - protection from water and debris.
- Adjustable CCT 3000K/3500K/4000K/5000K/6500K.

Dimension



Item	A	B	C
4ft	1200mm	79mm	74mm
8ft	2390mm	98mm	85mm

Accessories

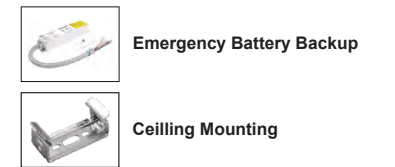


SKU	Size	CCT Select	Power Select	Light Output	Efficacy
RMS-H251560	4FT	3000K/3500K/4000K/5000K/6500K	Max 40W	Max 8700lm	146 lm/W
RMS-H2515100	8FT	3000K/3500K/4000K/5000K/6500K	Max 100W	Max 14600lm	146 lm/W

LED VAPOR TIGHT LIGHT

ROMANSO H2515 series Vapor Tight fixture withstands rugged environments and is available in 4FT and 8FT length. The fixture housing is made of clean and pure PC material with excellent stability and durability, and a stainless steel clip for easy disassembly and installation. With the ability to switch lumens and adjust color temperature in one fixture, greatly reducing SKUs. Emergency Battery Back Up and sensor options are available. The RMS-H2515 series vapor tight is ideal solutions for outdoor venues, canopies and locker rooms

CCT AND WATTAGE SELECTABLE

This fixture has the function of adjusting the lumens output and color temperature on-site.

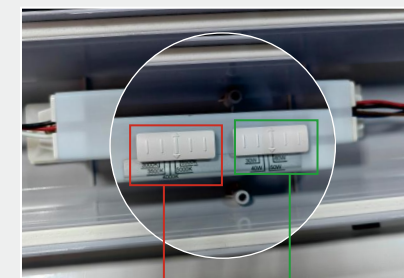

WATTAGE SELECT

● LV1 ● LV2 ● LV3 ● LV4

Each model supports 4 positions
wattage regulation:
LV1, LV2, LV3, LV4

CCT SELECT

3300K 3500K 4000K 5000K 6500K

Offer three CCT adjustable
(3000K, 3500K, 4000K, 5000K,
6500K).